


06 Downlights Fixed LED>The SMD Dark Light Range

## 10122D/B/W

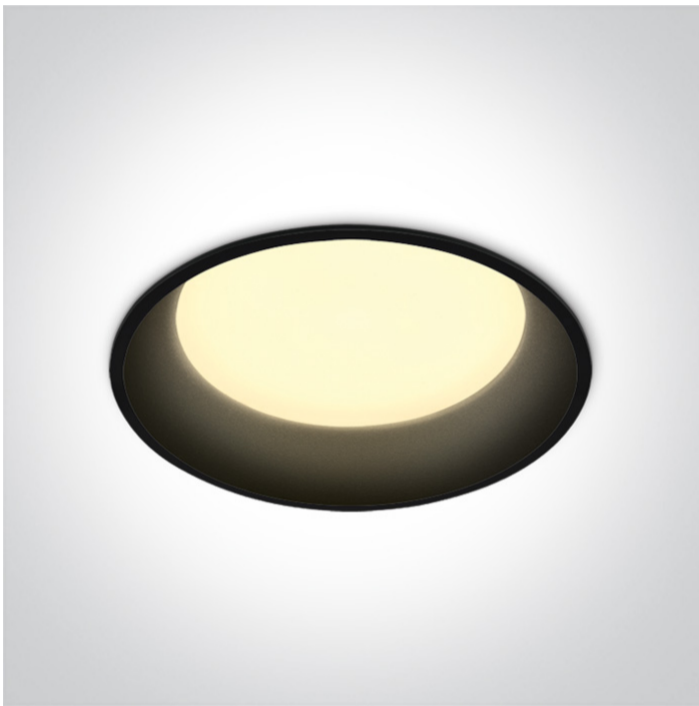

22W Dark Light LED Downlight .

Supplied with 500mA non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions



### Physical Specification

|                      |                          |
|----------------------|--------------------------|
| Item Group           | 06 Downlights Fixed LED  |
| Family               | The SMD Dark Light Range |
| Order Code           | 10122D/B/W               |
| Colour               | Black                    |
| Material             | Die Cast                 |
| Shape                | Circular                 |
| Height               | 55mm                     |
| Diameter             | 175mm                    |
| Cutout Hole Diameter | 165mm                    |
| Recessed Ceiling     | Yes                      |
| Depth Required       | 75mm                     |
| Indoor               | Yes                      |

Adjustable

No

## Electrical Characteristics

Gear

External-Included

### Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

22W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



### Fitting

Input Type

Constant Current

Input Current

500mA

Voltage

40V

Safety Class



Power(Watts)

20W

IP Rating

IP20

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Sanan

Gear

Gear Type


Led Driver

Input Voltage


220-240V

50 Hz

Yes

|                  |   |
|------------------|---|
| 60 Hz            | Yes   |
| Power(Watts)     | 12,5-20W  |
| Power Factor     | 0,9   |
| Constant Current | Yes   |
| 500mA            | 25-40V  |
| IP Rating        | IP20  |
| Safety Class     |  |
| Dimmable         | No  |
| Ambient Temp     | -30? ~ +50?   |
| Housing Material | Plastic   |
| Brand            | Lifud   |

## Illumination Data

|                      |   |
|----------------------|---|
| Colour Temperature   | 3000K   |
| Lumen Output         | 1870lm  |
| Light Efficiency     | 85lm/W  |
| CRI                  | 80  |
| Beam Angle           | 100°  |
| Illumination Diagram |  |
| Dark Light           | Yes   |

## Packing Info

|            |               |
|------------|---------------|
| Box Length | 20cm          |
| Box Width  | 7cm           |
| Box Height | 18cm          |
| Pcs/Carton | 20            |
| Barcode    | 5291889060727 |
| HS Code    | 9405409900    |

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

