

09 LED Strips & Profiles > The 4,8W/m Indoor 24V

7820L/C



Flexible LED light strip, with SMD2216 LEDs, 60LEDs/meter, 4,8W/meter. Supplied in 15 meters roll with white PCB and double adhesive tape for a better fixing.

Can be cut every 10cm (6-LED segment).

Requires 24V DC constant voltage LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

Cut every 10cm
(7-LED segment)




Gallery



Accessories



7822



7824

Related items



20030

Physical Specification

Product Type	Gear
Item Group	09 LED Strips & Profiles
Family	The 4,8W/m Indoor 24V
Order Code	7820L/C
Shape	Rectangular
Length	15000mm
Width	8mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes

Electrical Characteristics

Fitting

Input Type	Constant Voltage
Input Voltage	24V DC
Safety Class	III
Power(Watts)	4,8W/m
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2216
LED Brand	Refond
LED Number	60LEDs/m

Illumination Data

Colour Temperature	4000K
--------------------	-------

Lumen Output	384lm/m
--------------	---------

Light Efficiency	80lm/W
------------------	--------

CRI	90
-----	----

Illumination Diagram	
----------------------	---

Packing Info

Box Length	25cm
------------	------

Box Width	25cm
-----------	------

Box Height	2cm
------------	-----


Box Weight	0,36kg
------------	--------

Pcs/Carton	40
------------	----

Barcode	5291889054443
---------	---------------

HS Code	9405409989
---------	------------

Energy Label

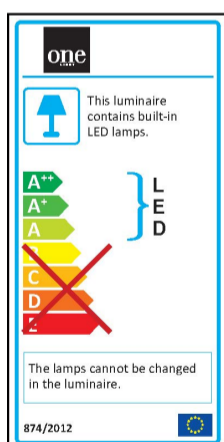

Warranty

3 Years

Wee Directive

Yes

switch to
one light!

one
LIGHT

