

21 Industrial & Floodlights>The COB LED Slim Floodlights

## 7028AB/AN/C



20W COB LED Slim floodlight, IP65.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

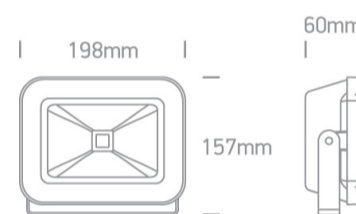

### Physical Specification

Item Group	21 Industrial & Floodlights
Family	The COB LED Slim Floodlights
Order Code	7028AB/AN/C
Colour	Anthracite
Material	Die Cast
Shape	Rectangular
Length	198mm
Width	157mm
Height	60mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes

Outdoor

Yes

Adjustable

1 Direction

## Electrical Characteristics

Gear

Built In

### Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

20W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

Cable Length

100cm

F Mark



### Fitting

Input Type

Constant Current

Input Current

600mA

Voltage

32V

Power(Watts)

19,2W

IP Rating

IP65

Light Source

LED built in

LED Type

COB

LED Brand

Epistar


Gear

Gear Type


Led Driver

Input Voltage

100-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	16,8-21W
Power Factor	0,9
Constant Current	Yes
600mA	28-35V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector

#### Illumination Data

Colour Temperature	4000K
Lumen Output	1400lm
Light Efficiency	70lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

#### Packing Info

Box Length	17,5cm
Box Width	6cm
Box Height	20cm
Box Weight	1,2Kg
Pcs/Carton	12
Barcode	5291889040910
HS Code	9405409900

#### Energy Label



## Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

