

21 Industrial & Floodlights>The COB LED Slim Floodlights

7028E/AN/C



2x50W COB LED Slim floodlight, IP65.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

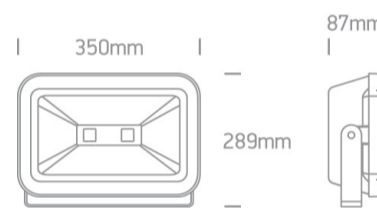

Physical Specification



Item Group	21 Industrial & Floodlights
Family	The COB LED Slim Floodlights
Order Code	7028E/AN/C
Colour	Anthracite
Material	Die Cast
Shape	Rectangular
Length	350mm
Width	289mm
Height	87mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes

Outdoor
Adjustable

Yes
1 Direction

Electrical Characteristics

Gear
Fitting + Driver
Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
Cable Length
F Mark

Built In
100-240V
Yes
Yes

2x50W
IP65
LED built in
No
100cm


Fitting
Input Type
Input Current
Voltage
Power(Watts)
IP Rating
Light Source
LED Type
LED Brand
LED Number


Constant Current
1500mA
2x32V
2x48W
IP65
LED built in
COB
Epistar
2

Gear
Gear Type

Led Driver


Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	33-54W
Power Factor	0,9
Constant Current	Yes
1500mA	22-36V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector

Illumination Data

Colour Temperature	4000K
Lumen Output	7000lm
Light Efficiency	70lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Length	31cm
Box Width	8,8cm
Box Height	35,2cm
Box Weight	5Kg
Pcs/Carton	3
Barcode	5291889042068
HS Code	9405409900

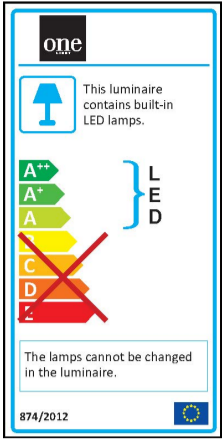

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

